

SOIL

10 LITER CAPACITY PLANETARY MIXER

PRODUCT CODE

NT-G3100M 10 Liter capacity planetary mixer



SPECIFICATIONS

This 10-liter mixing capacity mixer is designed for high quality and reliability, suitable for benchtop use. It adheres to standards while also meeting the demand for more extensive testing of other materials for research applications.

Thanks to its planetary mixing mechanism, the mixing paddle rotates around its own axis at 20 to 480 rpm and simultaneously moves around the mixing bowl at 10 to 240 rpm. This bi-directional mixing ensures homogeneity and repeatability throughout the entire mix. The speed can be manually adjusted by the user using the potentiometric speed adjustment knob on the mixer. The planetary mixer is equipped with safety switches that automatically stop mixing if the user lowers the mixing bowl with the handle.
If used for asphalt design, an electric Isomantle heater must be ordered separately.
For proper mixing operation, the container containing the bituminous sample must be heated to the temperature specified in the Standards. A standard laboratory oven is used for this purpose, and the sample mixing process is performed immediately after removing the container from the oven.

Technical Features

Capacity	**10 Liter**
Material	**Stainless steel mixing bowl and pallet**
Mixing program	**Manual, with potentiometer**
Areas of use	**Sample preperation**




SOIL

In-situ CBR Test Set

PRODUCT CODE

NT-S5680 In-situ CBR Test apparatus, 50 kN capacity

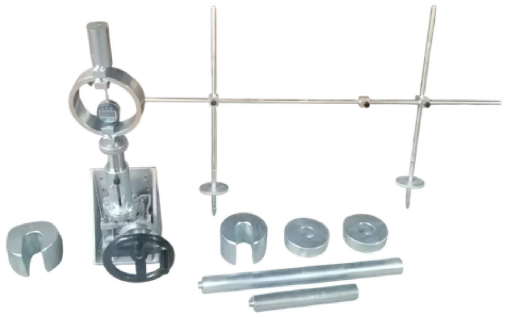

STANDARDS

ASTM D4429, BS 1377:9, BS 1924:2

SPECIFICATIONS

The Field CBR Test Set is a testing system used to quickly and accurately measure the bearing capacity of soils in situ.
This device, critically important in engineering applications such as road construction (asphalt and stabilized road bases), foundations and fill areas, airport runways, and infrastructure, allows for the determination of the California Bearing Ratio (CBR) in the field.
This system is equipped with a mechanical jack, load ring, penetration piston, and load ring. Its 50 kN capacity ensures high accuracy in soil strength measurements.

TECHNICAL SPECIFICATIONS

Loading Jack (Mechanical)	50 kN capacity, ball bearing, manual operation
Load Ring	50 kN capacity, high precision measurement
CBR Penetration Piston	Standard sizes, adjustable
Dial Gauges	Adjustable, with fixed connection piece
Extension rods	2 pieces of 110 mm, 1 piece of 305 mm, 1 piece of 610 mm
Datum Bar System	With tripod stands and 1400 mm bar
Additional Load Weights	4.5 kg circular and slotted, 9 kg slotted weights
Carrying Case	Wooden box for easy transport and storage



SOIL

CBR Test Device with Load Ring

PRODUCT CODE

NT-S2580 50 kN CBR Test device with Load Ring, 220-240V 50-60hz. 1 ph.



STANDARDS

AASHTO T193, ASTM D1883,
BS 1377:4, EN 13286-47

SPECIFICATIONS

The CBR Testing Machine is designed to determine CBR values and strength values of base and subbase materials with dimensions less than 19 mm.
The CBR testing machine consists of a bench-type motorized frame with a compact base unit. The machine has a capacity of 50 kN and a constant test speed of 1.27 mm/min.

The machine is equipped with upper and lower piston travel limit switches.
Device is supplied complete with a 50 kN capacity load ring, a penetration piston, a stabilising bar, and a digital indicator with a 25 mm stroke and 0.01 mm accuracy.

TECHNICAL SPECIFICATIONS

Frame	50 kN capacity, Electical engine for loading
Load Ring	50 kN capacity, high sensitive measurement
CBR Penetration Piston	Complies with Standards, height adjustable
Dial Gauges	Adjustable, with connection
Dim. weight (w x d x h)	470 x 610 x 1100 mm approx. 80 kg
Power	220-240V 50-60hz. 1 ph

www.noustest.com

ADDRESS:Ivedik OSB. 1462. Sk. No:24, P.K. 06374
Ivedik Osb Yenimahalle - Ankara / Turkiye

info@noustest.com



SOIL

Automatic CBR Test Device

PRODUCT CODE

NT-S2590 Automatic Digital CBR Test Machine 50 kN 220-240V, 50-60hz.1ph.



STANDARDS

AASHTO T193, ASTM D1883 •
EN 13286-47 • BS 1377-4

SPECIFICATIONS

The Automatic CBR Testing Machine is specifically designed to measure the bearing capacity of road substructures and soil layers in a laboratory environment.
It is particularly suitable for the strength analysis of highway subbases, subgrades, and cohesive materials with a maximum grain size of 19 mm.
The device features a 50 kN capacity double-column test frame with an electromechanical drive, a digital control unit, and high-precision load cell measurement systems. Its user-friendly interface and automated testing features increase test repeatability and accuracy.
The machine is equipped with upper and lower piston travel limit switches.

Advantages

- ✅Full automatic test cycle: Load, data-logging and graphs are automatically produced.
- ✅High Sensitivity: ±0.1% accuracy with advanced sensor technology
- ✅Multi Purpose use: Compatibility with ASTM, BS, EN, AASHTO test standartlards
- ✅Ease of Use: User-friendly interface and quick installation
- ✅Robust Frame: Robust and compact design suitable for laboratory conditions

Technical Specifications

Frame	50 kN capacity, Digital screen
Load Cell	50 kN capacity, high sensitive load cell
CBR Penetration Piston	Complies with the standards
Displacement transducer	25mm x 0,01mm sensitive linear potentiometric displacement transducer
Ölçüler En x Boy x Yükseklik	470 x 610 x 1100 mm ağırlık yaklaşık 80 kg
Voltaj	220-240V 50-60hz. 1 ph

www.noustest.com
ADDRESS:Ivedik OSB. 1462. Sk. No:24, P.K. 06374 Ivedik Osb Yenimahalle - Ankara / Turkiye
info@noustest.com



SOIL

Automatic Soil Compactor

PRODUCT CODE

NT-S0560 Automatic Soil Compactor
220-240V, 50 hz. 1 ph.

STANDARDS

ASTM D698, CNR N. 69, CNR UNI 10009, EN 13286-2, ASTM D1557, ASTM D1883, AASHTO T99 AASHTO T180, AASHTO T193

SPECIFICATIONS



The Automatic Soil Compactor is used to determine the relationship between molding water content and dry unit weight of soils, enabling accurate determination of optimum moisture content and maximum dry density.

Capable of performing both Standard and Modified Proctor compaction tests, the unit ensures precise, uniform compaction as per ASTM, AASHTO, and EN testing requirements.
A digital screen enables the operator to choose the type of compaction required (circular blow pattern for 4” or 100mm specimen moulds and double concentric circles for 6” or 150 mm specimen moulds).
The height of the rammer drop is adjustable to 305 mm or 457 mm and the weight of the rammer can be adjustable either 2,5 kg or 4,5 kg. Adjustable rammer weights and drop heights support compliance with multiple standards, enhancing the machine’s adaptability to varied testing requirements.
The rotating base ensures even distribution of compaction energy, eliminating inconsistencies and improving specimen integrity.

The machine is designed for long-term operation and has built-in safety features (to CE Standards) to prevent it from being operated without the unbreakable safety guard.



SOIL

Manuel CBR, Marshall Sample Extruder

PRODUCT CODE

NT-S0800 Manuel Sample Extruder 30 kN



STANDARDS

AASTHO T134, AASTHO T180, AASTHO T193, AASTHO T245, ASTM D1557, ASTM D1559, ASTM D1883, ASTM D698, BS 1377:4, BS 1924:2, BS 598:107, EN 12697-30, EN 13286-2, EN 13286-47

SPECIFICATIONS

Marshall/CBR/Proctor Sample Extruder is designed to extrude specimens easily and quickly from Marshall and CBR, standard and modified proctor moulds. Constructed from stell,

The extruder is supplied complete with a manual hydraulic jack and 2 pcs. adaptor to extrude specimens from Ø100 mm (4”) and Ø150 mm (6”) dia. Proctor, CBR and Marshall moulds.
Moulds can be easily fitted by dedicated bracket support that can be adjusted in order to match the right height of the mould to be extract.



SOIL

Horizontal Motorised Sample Extruder

PRODUCT CODE

NT-S0910 Horizontal Motorised Sample Extruder 60 kN



STANDARDS

AASTHO T134, AASTHO T180, AASTHO T193, AASTHO T245, ASTM D1557, ASTM D1559, ASTM D1883, ASTM D698, BS 1377:4, BS 1924:2, BS 598:107, EN 12697-30, EN 13286-2, EN 13286-47

SPECIFICATIONS

- Horizontal Sample Extruder is designed for extracting samples from molds, tubes, Shelby tubes, and cutting rings.
- Features a hydraulic system for quick and effortless extraction with the press of a single button.
- With an impressive 900 mm ram travel, it ensures efficient operation, complemented by speed control for precise handling.
- Device is supplied with Ø 100 mm adaptors set and Ø 150 mm adaptors sets.
- Oil Level can be seen from the front Oil level indicator.



SOIL

Motor-operated CBR, Marshall Sample Extruder

PRODUCT CODE

NT-S0900 Motor-operated Sample Extruder 100mm 220-240V, 50-60 Hz, 1 ph

STANDARDS

AASTHO T134, AASTHO T180, AASTHO T193, AASTHO T245, ASTM D1557, ASTM D1559, ASTM D1883, ASTM D698, BS 1377:4, BS 1924:2, BS 598:107, EN 12697-30, EN 13286-2, EN 13286-47



SPECIFICATIONS

Marshall/CBR/Proctor Sample Extruder, Marshall / CBR, Extruder is designed to quickly and easily extract samples from standard and modified Proctor molds.

Motor-operated steel sample extruder comes with two adapters for extracting samples from Proctor, CBR, and Marshall molds with diameters of Ø100 mm (4 inches) and Ø150 mm (6 inches).
The molds can be easily positioned using a special bracket support that adjusts to the correct height for the mold being processed.



SOIL

Liquid Limit Device (Casagrande)

PRODUCT CODE

NT-S2020 Manuel Liquid Limit Device
NT-S2120 Motorised Liquid Limit Device 220 V 50 Hz, 1 ph.
NT-S2125 Metal Grooving tool ASTM



STANDARDS

ASTM D4318; BS 1377:2; AASHTO T89

SPECIFICATIONS

The liquid limit device is used to determine the moisture content at which clay soils pass from a plastic to a liquid state. Defined as a point where two halves of a soil sample flow together when dropped 25 times in a specified manner using a Liquid Limit machine. The device consists of: removable brass cup, cup adjustment crank, blow counter, metal grooving tool and hard plastic base complies with the related standards.

Manuel Model
Hand-operated liquid limit machine features mechanical revolution counter attached to the shaft to register the number of drops in the liquid limit cup.

Motorised Model
Motorized liquid limit device gives uniform testing with greater degree of accuracy . Unit is comprised of manual liquid limit machine with geared motor to give proper operating speed and a counter. Machine is attached to metal plate with rubber feet. Includes grooving tool and gauge block



Metal Grooving Tool



SOIL

Sieve Shaker Device

PRODUCT CODE

NT-G1130 Sieve Shaker with digital time adjustment, suitable for sieves having dia. 200 - 250 - 300 - 315 mm, and 8”...12”

NT-G1131 Sieve Shaker with digital time and frequency adjustment by a potentiometer, suitable for sieves having dia. 200 - 250 - 300 - 315 mm, and 8”...12”



STANDARDS

ASTM E11, ASTM E323, BS 410-1, BS 410-2, EN 932-5, ISO 3310-1, ISO 3310-2

SPECIFICATIONS

The sieve shaker applies a circular motion to the material being sieved so that it makes a slow progression over the surface of the sieve. They are ideal for heavy duty applications when heavy or large bulk samples have to be analyzed.

Sieve shakers are equipped with a power source which ensures the right vibration is applied to the sieves and sample for fast, accurate and repeatable tests. The vertical movement is fixed to ensure the sample spends maximum time on the sieve surface.

The shaker is fitted with a clamping device that ensures sieves are being hold firmly without over-tightening and allows them to be quickly removed and replaced.

The shaker is fitted with digital timer which can be pre-set for any duration up to 99 minutes.

Device accepts 12 pieces of 200 (8”) mm half-height (50mm) sieves + pan and cover or 8 pieces of 300 (12”) mm half height (50mm) sieves + pan and cover

Wet sieving kits in the appropriate sizes may be used with this shaker.

www.noustest.com

ADDRESS:Ivedik OSB. 1462. Sk. No:24, P.K. 06374 Ivedik Osb Yenimahalle - Ankara / Turkiye

info@noustest.com



SOIL

Constant Head Permeability Test Set

PRODUT CODE

NT-S0040 Constant Head Perpeability Test Set Ø75 mm
NT-S0042 Constant Head Perpeability Test Set Ø115 mm

STANDARDS

BS 1377:5

SPECIFICATIONS

The setup is supplied complete with three manometer tubes mounted on a wooden base, a steel rule, a clear plastic water tank, plastic hoses, and a constant-level permeability cell.
The constant-level permeability cell is constructed from a Plexiglas body between a top and bottom aluminum plate with three pressure points.



www.noustest.com
ADDRESS:Ivedik OSB. 1462. Sk. No:24, P.K. 06374 Ivedik Osb Yenimahalle - Ankara / Turkiye
info@noustest.com



SOIL

Falling Head Permeability Test Set

PRODUCT CODE

NT-S0016 Falling Head Permeability Test Set

STANDARDS

BS 1377:5

SPECIFICATIONS

A falling head permeability test is a laboratory test performed to determine the water permeability of soils. This test is used to understand the water flow rate in soils and the effects of soil properties on water movement. The falling head permeability test aims to determine the hydraulic conductivity coefficient (k) of soils. Hydraulic conductivity indicates the soil's ability to conduct water and is a critical parameter for water movement, drainage, and stability analyses in geotechnical engineering.
The Falling Head Permeability Cell is constructed of steel with an inner diameter of 100 mm. The set consists of a wooden stand with a manometer tube, a water overflow tank, permeability cell inner dia 100 mm and a plastic hose.



www.noustest.com

ADDRESS:Ivedik OSB. 1462. Sk. No:24, P.K. 06374 Ivedik Osb Yenimahalle - Ankara / Turkiye

info@noustest.com



SOIL

Consolidation (Odeometer)

PRODUCT CODE

NT-S0030 Consolidation device (one dimensional)
NT-S0031 Consolidation bench with 3 device capacity
NT-S0032 Consolidation Cell for Ø 50 mm samples
NT-S0032/1 Lower and upper porous stone for Ø 50 mm samples
NT-S0032/2 Cutting ring for Ø 50 mm samples
NT-S0032/3 Calibraiton disk for Ø 50 mm samples
NT-S0032/4 Sample preperation apparatus for Ø 50 mm samples
NT-S0033 Consolidation Cell for Ø 63,5 mm samples
NT-S0033/1 Lower & upper porous stone for Ø 63,5 mm samples
NT-S0033/2 Cutting ring for Ø 63,5 mm samples
NT-S0033/3 Calibration disk for Ø 63,5 mm samples
NT-S0033/4 Sample preperation apparatus for Ø 63,5 mm samples
NT-S0034 Consolidation Cell for Ø 75 mm samples
NT-S0034/1 Lower & upper porous stone for Ø 75 mm samples
NT-S0034/2 Cutting ring for Ø 75 mm samples
NT-S0034/3 Calibration disk for Ø 75 mm samples
NT-S0034/4 Sample preperation apparatus for Ø 75 mm samples
NT-S0036 Consolidation weight set 50 kg (3x 10 kg, 2x 5 kg, 3x 2 kg, 2x 1 kg, 3x 0,5 kg, 2x 0,25 kg)
NT-S0038 Consolidation weight set 64 kg (4x 10 kg, 3x 5 kg, 2x 2 kg, 3x 1 kg, 3x 0,5 kg, 2x 0,25 kg)
NT-GM0250 Digital dial gauge 12.7 mm stroke 0,001 mm sensitivity (don't sleep)
NT-GM0260 digital dial gauge 25 mm strok 0,01 mm sensitivity (don't sleep)



How to Sellect;

For Ø 50 mm Samples
(For different diameter samples, only the cell code will be changed, other codes and quantities will remain the same)
NT-S0030 Consolidation device **3** pcs
NT-S0031 Consolidation bench (3 device capacity) **1** pcs
NT-S0032 Consolidation Cell for Ø 50 mm samples **3** pcs
NT-S0036 Consolidation weight set 50 kg **3** pcs
NT-GM0250 Digital dial gauge 12.7 mm stroke **3** pcs or
NT-GM0260 Digital dial gauge 25 mm stroke **3** pcs

STANDARDS

ASTM D2435 ASTM D3877 ASTM D4546 AASHTO T216 BS 1377:5 UNE 103-602 UNI EN ISO 17892-5

SPECIFICATIONS

NT-S0030 is used to determine the behavior of the soil sample upon certain loading in a specified period of time. It indicates the settlement characteristics of the soil which is known as Consolidation.
The beam provides three loading ratios: 9:1, 10:1, and 11:1. The beam assembly is fitted with an adjustable counterbalance weight.
Maximum load: 170 kg of slotted weights, corresponding to 1870 kg using the beam ratio 11:1.
Consolidation cells are manufactured from corrosion-resistant materials in accordance to the standards. The outer wall of the cell is made of Plexiglas, and collapse can be observed during testing. All cells are supplied with upper and lower porous stones, a loading head, and a cutting ring.



SOIL

Automatic Consolidation (Odeometer)

PRODUCT CODE

NT-S0010 Automatic Consolidation device (one dimensional), 20 kN Capacity. 220-240V,50-60Hz., 1 ph.
NT-S0032 Consolidation Cell for Ø 50 mm samples
NT-S0032/1 Lower and upper porous stone for Ø 50 mm samples
NT-S0032/2 Cutting ring for Ø 50 mm samples
NT-S0032/3 Calibraiton disk for Ø 50 mm samples
NT-S0032/4 Sample preperation apparatus for Ø 50 mm samples
NT-S0033 Consolidation Cell for Ø 63,5 mm samples
NT-S0033/1 Lower & upper porous stone for Ø 63,5 mm samples
NT-S0033/2 Cutting ring for Ø 63,5 mm samples
NT-S0033/3 Calibration disk for Ø 63,5 mm samples
NT-S0033/4 Sample preperation apparatus for Ø 63,5 mm samples
NT-S0034 Consolidation Cell for Ø 75 mm samples
NT-S0034/1 Lower & upper porous stone for Ø 75 mm samples
NT-S0034/2 Cutting ring for Ø 75 mm samples
NT-S0034/3 Calibration disk for Ø 75 mm samples
NT-S0034/4 Sample preperation apparatus for Ø 75 mm samples



STANDARDS

ASTM D2435 ASTM D3877 ASTM D4546 AASHTO T216 BS 1377:5 UNE 103-602 UNI EN ISO 17892-5

SPECIFICATIONS

- Automatic Consolidation Device is designed for fully automated execution of one-dimensional consolidation and swell tests in accordance with international standards. The system ensures high accuracy, repeatability, and efficiency in soil compressibility evaluation.
- Combines servo-controlled loading with real-time data acquisition to perform incremental consolidation, constant rate of strain, swelling, CHG, and optional unconfined compression tests without manual intervention.
- Utilizes closed-loop PID control and precision transducers for reliable application and monitoring of axial displacement and load.
- Features compact, bench-top design with integrated actuators and modular electronics, eliminating the need for dead weights or hydraulic systems.
- Supports networked operation with USB connectivity for centralized control, and includes touchscreen interface for standalone use.
- Compatible with Windows-based software for automated test management, result plotting, and report generation in multiple international formats.
- **Test cells for different sample diameters needs to be ordered seperatly.**

www.noustest.com
ADDRESS:Ivedik OSB. 1462. Sk. No:24, P.K. 06374 Ivedik Osb Yenimahalle - Ankara / Turkiye
info@noustest.com



SOIL

Dynamic Cone Penetrometer (DCP)

PRODUCT CODE

NT-S5900 Dynamic Cone Penetrometer Test Set (DCP)

STANDARDS

ASTM D2435 ASTM D3877 ASTM D4546 AASHTO T216 BS 1377:5 UNE 103-602 UNI EN ISO 17892-5



SPECIFICATIONS

The dynamic cone penetrometer (DCP) is a portable, fast and cost-effective manually operated tool for in-place testing of fine-grained soils, pavement base courses, sub-bases, and soil subgrade layers. The test is performed by dropping the 8 kg hammer from a height of 575 mm, the DCP drives a 60° cone into the soil, measuring penetration resistance per blow. This data correlates with soil strength parameters such as CBR (as per sperimental Kleyn 1982 studies.) and allows for quick identification of weak zones or inconsistencies in compaction

The equipment consists of:

- 8 kg Hammer,
- Penetration Bar,
- 2 pcs. 60° Conical Tips,
- Metal Plate for Ruler Attachment,
- Ruler Reading Plate
- Anvil,
- Extension Rod (430 mm),
- Extension Rod (994 mm),
- Wrench, 13 mm and 17 mm,
- Adhesive,
- Steel Ruler, and
- Wooden Carrying Case.



SOIL

Direct Shear Test Device

PRODUCT CODE

NT-S0600 Direct Shear Test Device (5 kN kapasiteli)
NT-S0605 Shear Box Set for 60x60 mm samples
NT-S0610 Shear Box Set for Ø 60 mm samples
NT-S0615 Shear Box Set for 100x100 mm samples
NT-S0620 Shear Box Set for Ø 100 mm samples
NT-S0625 Shear Box Set for Ø 2,5 inch samples
NT-S6100 Slotted weight set, 50 kg (4x10 kg, 1x5 kg, 2x2 kg, 1x1 kg)



STANDARDS

AASHTO T236, ASTM D3080; BS 1377:7; EN-ISO 17892-10

SPECIFICATIONS

The Automatic Direct Shear Testing Machine is a servo-motor-controlled testing system developed to measure the shear strength of soil materials with high precision under consolidated and drained conditions. It is designed to perform direct and residual shear tests on undisturbed or pre-mixed soil samples.
The device offers the ability to perform direct shear testing, one of the most critical tests used in analyzing soil mechanical behavior, fully automatically and without requiring user intervention.

Fully Automatic Test Process: Position resetting and system checks are performed automatically at the beginning of the test.

Servo Motor Driven Mechanism: Infinitely variable speed control between 0.00001 mm/min and 9.99999 mm/min, enabling forward and reverse movement.

Load Application Device: A lever-operated loading system with ratios of 9:1, 10:1, and 11:1 allows for a total vertical load of up to 5 kN with a weight of up to 50 kg.



SOIL


Direct Shear Test Device

SPECIFICATIONS

Sample Size Compatibility:

Square: 60x60 mm and 100x100 mm
Circular: Ø60 mm, Ø100 mm, and Ø2.5''

RS232 & PC Software Compatibility:
The test process can be monitored via computer, graphical data can be generated (shear stress - vertical stress curves), and cohesion and internal friction angles are automatically calculated.

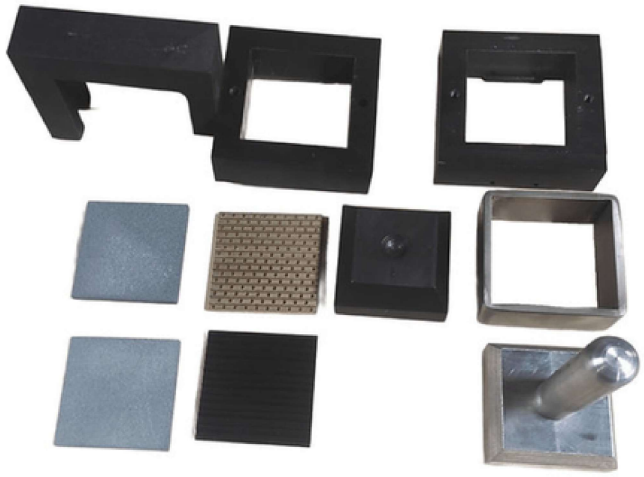

Touch Screen & User Friendly Interface: Test start, stop, data tracking and sensor calibrations can be easily performed via the microprocessor-controlled 6" color TFT screen.

Technical Specifications:

Capacity	: 5 kN
Loading Speed	: 0.00001 – 9.99999 mm/min (forward/reverse)
Reverse Speed	: 10 mm/min
Vertical Displacement	: 10 x 0.001 mm
Horizontal Displacement	: 25 x 0.001 mm
Voltage	: 220-240V, 50-60Hz

Note: Shear box assemblies (for different sizes) must be ordered separately.



SOIL

Plastic Limit Test Set

PRODUCT CODE

NT-S0520 Plastic Limit Test Set
NT-S0521 Glass plate 300x300x10 mm
NT-S0522 Referance rod Ø 3 mm
NT-GH5841 Flexible spatul, 100 mm length
NT-GC0525 Moisture content tins Ø 55x35 mm. (6 pcs.)
NT-GP0010 Wash bottle 250 ml
NT-GS0140 Porcelain cup 100 mm



STANDARDS

ASTM D4318 AASHTO T90 BS 1377:2
UNI 10014 UNE 103-104

PRODUCT CODE

Plasticity is a property of fine-grained soils and refers to the ability to be shaped without breaking. The plastic limit determines the lowest moisture content of soil, by which a sample can be rolled Ø 3 mm without breaking either longitudinally or transversely.



SOIL

Proctor Mould & Rammers

STANDARDS

ASTM D 698, D 1557, D 558;
AASHTO T 99, T180, T 134;
TS EN 13286-2; BS 1377:4, 1924:2;
TS 1900-1



SPECIFICATIONS

Moulds and Rammers are used to determine the relationship between moisture and temperature in compacted soil. Moulds made of coated steel. Consist of mould body, extension collar and base plate. Rammers used in compacting soil samples in proctor moulds are made of coated steel.

Product Code & Technical Specifications

Proctor Moulds

Product Code	Description	Inner Dia. (mm)	Body Height (mm)	Volume (cm3)	Weight (Approx.) kg
NT-S0060A	Standard Proctor Mould, ASTM	101.6 ± 0.4	116.4 ± 0.5	944.0 ± 14	7
NT-S0061A	Modified Proctor Mould, ASTM	152.4 ± 0.7	116.4 ± 0.5	2124 ± 25	9
NT-S0060EN	A Type Proctor Mould (Standard), TS	100 ± 1	120± 1	942	5
NT-S0061EN	B Type Proctor Mould (Modified), TS EN	150 ± 1	120 ± 1	2120	89
NT-S0060BS	1 liter Mould (Standard Proctor), BS, TS	105±0.5	115.5±0,5	1000	5
NT-S0061BS	CBR type Mould (Modified Proctor), BS / Vibrating	152 ± 0.5	127 ± 1	2303	73
NT-S0060TS	1 liter Mould BS, TS 1900-1	105±0.5	115.5±0,5	1000	5
NT-S0061TS	Modified Proctor Mould, TS 1900-	1.524	1.155	~ 2106	8



SOIL

Proctor Moulds & Rammers

Product Code & Technical Properties

Proctor Rammers

Product Code	Description	Rammer Dia (mm)	Falling Height (mm)	Rammer Mass (g)	Weight (Approx.) kg
NT-S0065A	Standard Proctor Rammer, ASTM	508	304.8± 1	2495 ± 23	45
NT-S0066A	Modified Proctor Rammer, ASTM	508	457 ± 1.3	4540 ± 10	8
NT-S0065EN	A Type Proctor Rammer (Standard), TS EN	50 ± 0.5	305± 3	2500 ± 20	45
NT-S0066EN	B Type Proctor Rammer (Modified), TS EN	50 ± 0.5	457 ± 3	4500 ± 40	8
NT-S0065BS	2,5 kg Rammer, BS	50 ± 0.5	300± 3	2500 ± 25	45
NT-S0066BS	4,5 kg Rammer, BS	50 ± 0.5	450 ± 4	4500 ± 50	8
NT-S0065TS	2,5 kg Rammer, Standard Energy,	50	305±1,5	2500±25	45
NT-S0066TS	4,5 kg Rammer, High Energy	50	458 ± 1,5	4500±50	8



SOIL

CBR Mould & Accesories, ASTM

STANDARDS

ASTM D1883; AASHTO T193



SPECIFICATIONS

This method was developed by the California State Highway Department and is accepted by nearly all currently applicable International Standards. The test is intended to evaluate the bearing capacity of soil for flexible pavement design in road construction. Compaction testing can be performed with both manual rammers and automatic compactors.

Made of steel and coated against corrosion, CBR equipment is available in different versions according to the various Standards in force.

ÜRÜN KODU

NT-S0070A	CBR Mold ASTM/AASHTO, 6" (152.4 mm) diameter x 7" (177.8 mm) high, with steel mold body, extension collar,
NT-S0071A	Spacer Disc. T-Handle, ASTM, 150.8 mm diameter x 61.4 mm height
NT-S0072A	Annular Surcharge weight, 2.27 kg
NT-S0073A	Slotted Surcharge weight, 2.27 kg
NT-S0074A	CBR Solid base plate
NT-S0075	Straightedge knife 300x30x5 mm
NT-S0076A	Filter Paper CBR No:5 x 150 mm çap (100 pcs)
NT-S0077A	Screen filter, Ø144 mm, 150 µm screen mesh
NT-S0067A	Tripod for CBR swelling test
NT-S0068	Adjustable Handle and Perforated Aluminum Plate for CBR swell Test
NT-SM0230	Analog dial indicator 30 mm stroke 0.01 mm reading accuracy
NT-SM0260	Digital dial indicator 25 mm stroke 0.01 mm reading accuracy
NT-SM0497	6 mold capacity soaking tank



SOIL

CBR Mould & Accesories, BS

STANDARDS

BS-1377-4

SPECIFICATIONS

Made of steel and coated against corrosion, CBR equipment is available in different versions according to the various Standards in force.
The CBR Mould Set is supplied complete with Extension Collar and Perforated Base Plate.
Other accessories must be ordered separately.



ÜRÜN KODU

NT-S0080B	CBR type Modified Proctor Mould, BS inner dia.: 152 mm, height: 127 mm, including collar and base plate.
NT-S0081B	Spacer Disk BS, Ø150 mm x 50mm height
NT-S0082B	Annular surcharge weight BS/EN, 2 kg
NT-S0083B	Slotted surcharge weight BS/EN, 2 kg
NT-S0084B	CBR perforated base plate BS
NT-S0085B	Filter paper CBR No:1 x 150mm dia ,100 pcs.
NT-S0086B	C-type Key to dismantle the mould 2 pcs
NT-S0087B	Base fixing apparatus
NT-S0075	Straightedge knife 300x30x5 mm



SOIL

CBR Mould & Accesories, EN

STANDARTLAR

EN 13286-47

ÜRÜN TANIMI

Made of steel and coated against corrosion, CBR equipment is available in different versions according to the various Standards in force.

The CBR Mould Set is supplied complete with Extension Collar and Perforated Base Plate.

Other accessories must be ordered separately.



ÜRÜN KODU

NT-S0090E	CBR Mould, EN inner dia.: 150 mm, height: 120 mm, including collar and base plate.
NT-S0091E	Annular surcharge weight BS/EN, 2 kg
NT-S0092E	Slotted surcharge weight BS/EN, 2 kg
NT-S0093E	CBR perforated base plate EN
NT-S0075	Straightedge Knife 300x30x5 mm
NT-S0094E	Filtrer Paper 148 mm dia (100 adet)
NT-S0067E	Tripod, for CBR swell test
NT-S0068	Adjustable Handle and Perforated Aluminum Plate for CBR swelling Test
NT-SM0230	Analog dial indicator 30 mm stroke 0.01 mm reading accuracy
NT-SM0260	Digital dial indicator 25 mm stroke 0.01 mm reading accuracy
NT-SM0497	6 mold capacity soaking tank



SOIL

Particle Size Distribution
Hydrometer Analysis Test Set

PRODUCT CODE

NT-S0720 Hydrometer Analysis Test Set
NT-S0722 High-speed mixer, 13,000 rpm, mixing cup, mixing blade, and a cup switch. 220-230V 50Hz, 1ph.
NT-S0723 Sedimentation cylinder, 1000 ml capacity (6 pcs. included in the set).
NT-S0724 Glass Hydrometer Bath
NT-S0725 Thermostatically controlled heater.
NT-S0726 Circulation pump
NT-S0727 Soil hydrometer 151H, 0.995-1.038 g/ml, 0.001 g/ml readibility
NT-S0728 Soil hydrometer 152H, 5-60 g/ml, 1 g/L readibility
NT-GT00150 Thermometer, 0-50°C, 0.5°C readibility
NT-GS0220 Borosilicate Glass Beaker, 250 ml Capacity
NT-GC0010 Sodium Hexametaphosphate, 1000 g



STANDARDS

ASTM D7928, ASTM D422, AASHTO T 88, TS 1900-1

SPECIFICATIONS

The hydrometer test is a sedimentation analysis performed to determine the grain size of silty and clayey soils consisting of very small-sized particles (grain sizes smaller than 0.075 mm) and the analysis method is based on Stokes' law.

www.noustest.com
ADDRESS:Ivedik OSB. 1462. Sk. No:24, P.K. 06374 Ivedik Osb Yenimahalle - Ankara / Turkiye
info@noustest.com



SOIL

Liquid Limit Penetrometer
Cone Penetrometer

PRODUCT CODE

NT-S0810 Liquid Limit (Cone) penetrometer
NT-S0812 Conical penetration rod 30° and total 80 gr weight
NT-S0812/1 30°Cone test gauge
NT-S0813 Conical penetration rod 60° and total 60 gr weight
NT-S0813/1 60°Cone test gauge
NT-GC0525 Sample cup with cover Ø55x35 mm made of aliminium



STANDARDS

BS 1377:2 UNI EN ISO 17892-12 UNI EN ISO 17892-06

SPECIFICATIONS

The conical tip liquid limit penetrometer apparatus is used to determine at which moisture content the clay soils changes from a plastic to a liquid state (liquid limit) and it is used also for the determination of undrained shear strength.

The device has a mounted adjustable feet with an iron base, a digital measurement display with 0.01 mm precision and and automatic zeroing, a release button, a spirit level and a spirit level, and a timer that allows the penetromer to drop automatically. Three(3 adet) NT-GC0525 55x35 mm sample boxes with lids and one (1) pc. NT-S0812/1 30°Cone test gauge are provided with the device.

The following must be ordered seperatly
NT-S0813 Conical penetration rod 60° and total 60 gr weight
NT-S0812/1 60°Cone test gauge



www.noustest.com
ADDRESS:Ivedik OSB. 1462. Sk. No:24, P.K. 06374 Ivedik Osb Yenimahalle - Ankara / Turkiye
info@noustest.com



SOIL

Plate Load Test Apparatus

PRODUCT CODE

NT-S1011 100 kN Capacity Plate Loading Test Set
NT-S1012 200 kN Capacity Plate Loading Test Set
NT-S1015 500 kN Capacity Plate Loading Test Set
NT-S1001 Manual Hydraulic Pressure Jack – 600 bar Pressure, supplied with a pressure transducer, hydraulic hose and a digital backlight LCD display.



STANDARDS

BS 1377, ASTM D1194

SPECIFICATIONS

The plate loading test set is a field loading test that can be used to obtain data for calculating the deformation modulus and bearing coefficient of subgrades and compacted road components.

The Plate Loading Test apparatus is supplied with the following;
NT-S1001 Manual Hydraulic Pressure Jack – 600 bar Pressure, supplied with a pressure transducer, hydraulic hose and a digital backlight LCD display.
NT-S1011 /2 100 kN Capacity Loading Piston (Piston capacity is given according to the selected model).
NT-S1011/3 Datum Bar – made of steel, 2.4 meters long and supplied with two legs and three dial indicator mounting brackets.
NT-SM0230 Dial indicator – 50 mm stroke length and 0.01 mm precision. 3 pcs
NT-S1011/5 :150 mm diameter loading plate
NT-S1011/7 : 305 mm diameter loading plate
And wooden carrying box.

Accesories :
NT-S1011/2 : Datum Bar – made of steel, 2.4 meters long, supplied with two legs and three dial indicator mounting brackets.
NT-SM0230 : Dial indicator – 50 mm stroke length and 0.01 mm precision. Three (3) pieces are used in the plate loading test.
NT-S1011 /4 : Manual Hydraulic Pressure Jack – 600 bar Pressure, supplied with a pressure transducer, hydraulic hose and a digital backlight LCD display.
NT-DSA0150 Digital Screen
Loading Plates – each plate was made of steel and galvanised for protection, thichness are 25 mm.
Loading plates needs to be ordered seperatly

Loading Plates;
NT-S1011/5 : Ø150 mm loading plate
NT-S1011/6 : Ø 253 mm loading plate
NT-S1011/7 : Ø 305 mm loading plate
NT-S1011/8 : Ø 455 mm loading plate
NT-S1011/9 : Ø 610 mm loading plate
NT-S1011/10 : Ø 760 mm loading plate

www.noustest.com
ADDRESS:Ivedik OSB. 1462. Sk. No:24, P.K. 06374 Ivedik Osb Yenimahalle - Ankara / Turkiye
info@noustest.com



SOIL

Water Level Indicator


PRODUCT CODE

NT-S0500 Water Level Indicator 50 Meter
NT-S0505 Water Level Indicator 100 Meter
NT-S0510 Water Level Indicator 150 Meter



SPECIFICATIONS

It is used for measuring the total depth of boreholes, water well depths, observation pipes, and water reservoirs.
When the electrode on the device's measuring probe contacts the water surface, an audible alarm and a warning light illuminate.
High-tensile steel tape measure and stainless steel conductor water level measurement probe; ASME approved

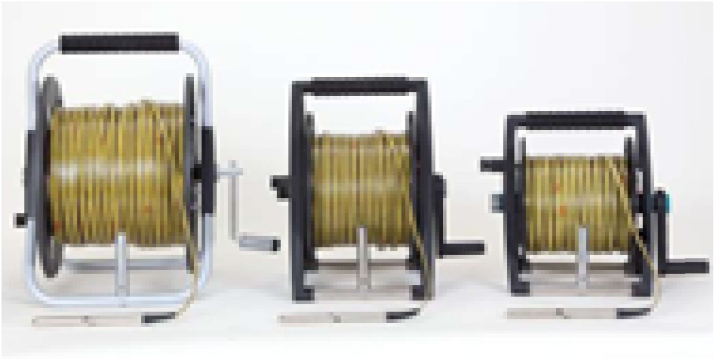



SOIL

Speedy Moisture Tester

PRODUCT CODE

NT-S5510 Speedy moisture test device

STANDARDS

AASHTO T217 ASTM D4944

SPECIFICATIONS

Speedy moisture tester is a portable test method for the determination of moisture content of soils, sand, and fine aggregates. The procedure involves the reaction between water and calcium carbide when mixed together give off a gas.



The amount of gas is directly proportional to the amount of water present in the sample and results in percentage are taken from the pressure gauge.

The tester is supplied complete with a precision scale, brushes, 2 pcs steel ball, measurement spoon and cup, and a calibration kit in a plastic carrying case.
Capacity 20 gr
Humidity range 0-20%



SOIL

Sand Replacement Test Set

PRODUCT CODE

NT-S0600 Sand Replacement Test Set, Ø100 mm
NT-S0605 Sand Replacement Test Set, Ø150 mm
NT-S0620 Sand Replacement Test Set, Ø200 mm



STANDARDS

BS 1377:9, BS 1924:2

SPECIFICATIONS

The Sand Replacement Test Set is used to simply determine the degree of compaction in the field.
The test set consists of a sand density cylinder, a calibration container, and a metal tray.
The sand density cylinder and calibration containers are made of cast aluminum and have electrostatic powder coating. The bottom tray is made of galvanized sheet steel.
We offer three different models, depending on soil grain size.

Test Application
A hole is drilled in the area to be tested.
A soil sample is removed, dried(in an oven), and weighed with an Electronic Balance.
The hole is filled with dry sand using a sand cone apparatus.
The volume of the hole is calculated by measuring the amount of sand used.



SOIL

Sand Cone Test Set

PRODUCT CODE

NT-S0590 Sand Cone Test Set 6,5”
NT-S0591 Sand Cone Test Set 8”
NT-S0592 Sand Cone Test Set 12”
NT-S0595 Spare Plastik Jarr for Sand Cone Test Set 5 Lt.





STANDARDS

ASTM D1556, AASHTO T191

SPECIFICATIONS

The Sand Cone Density Test is an economical and reliable soil testing method used to determine the degree of soil compaction in situ. This test measures the in-place density of compacted fine-grained or coarse-grained soils to calculate the percentage of compaction.
The Sand Cone test set consists of a galvanized double-metal cone, a plastic sand bottle, and a flanged perforated metal base plate.

Test Application
A hole is drilled in the area to be tested.
A soil sample is removed, dried(in an oven), and weighed with an Electronic Balance.
The hole is filled with dry sand using a sand cone apparatus.
The volume of the hole is calculated by measuring the amount of sand used.
The soil density is determined in situ.



SOIL

Vibrating Compaction Hammer

PRODUCT CODE

NT-S0050 Vibrating Compaction Hammer, 1000W.
NT-G0051 Supporting Frame for NT-0050 model Vibrating Compaction Hammer
NT-G0052 Small Tamping Foot Ø102 mm, only the Foot.
NT-G0053 Big Tamping Foot Ø146 mm, only the Foot.
NT-G0054 Shaft for Vibrating Compaction Hammer length 300 mm.



STANDARDS

EN 13286-4, BS 1377:4, BS 1924:2

SPECIFICATIONS

Vibrating Compaction Hammer (Kango Hammer) is a high-performance compaction equipment used for compacting Proctor, CBR, concrete, and asphalt samples in laboratory and field environments. Thanks to its high impact frequency and double-insulated motor, it reduces air voids within the sample, ensuring maximum density.

Support frame is designed to fit the hammer, consisting of two columns on a heavy metal plate and an upper beam to which the hammer is attached.

Support frame, tamping foots, and shaft must be ordered separately.

When the appropriate compaction head (tamper foot) is used, the device can also be effectively used in asphalt compaction operations within the scope of P.R.D. (Percentage Refusal Density) testing.



SOIL

Surface Soil Sampler

PRODUCT CODE

NT-S0070 Ø50mm Surface Soil Sampler Set
NT-S0072 Ø70mm Surface Soil Sampler Set
NT-S0074 Ø80mm Surface Soil Sampler Set
NT-S0076 Ø100mm Surface Soil Sampler Set
NT-S0078 Ø150mm Surface Soil Sampler Set
NT-S0071 3'' Surface Soil Sampler Set
NT-S0073 4'' Surface Soil Sampler Set



STANDARDS

BS 1377:9, ASTM D2937

SPECIFICATIONS

Surface Soil Sample Set (Core Cutter),
is used to determine the in-situ density of the soil by taking a standard volume of soil sample from the ground.
The sample taken is then removed, cut and weighed.
It is made of steel and coated with corrosion-resistant galvanizing.
The thickness of the cutting head is 1.5mm.

Product Code	Core Cutter Head	Rammer Weight kgs.
NT-S0070	Ø50mm x 40mm (1,5mm kalınlık)	8
NT-S0072	Ø70mm x 70mm (1,5mm kalınlık)	11
NT-S0074	Ø80mm x 80mm (1,5mm kalınlık)	12.5
NT-S0076	Ø100mm x 130mm (1,5mm kalınlık)	13.5
NT-S0078	Ø150mm x 180mm (1,5mm kalınlık)	16
NT-S0071	Ø76,2mm x 70mm (1,5mm kalınlık)	5
NT-S0073	Ø106.6mm x 127mm (1,5mm kalınlık)	5